

A basic CAD/CAM for the shop floor

Designed for usability and productivity

CIMCO CNC-Calc is an add-on for CIMCO Edit that enables novice programmers to draw 2D geometrical contours, lay out toolpaths for mill and lathe, and simulate the resulting NC program.

CNC-Calc is a great tool for the operators and toolmakers who are untrained in the use of advanced CAD/CAM systems. For them, CNC-Calc can help increase productivity and assist in the day-to-day NC programming. For a small company it can be the first step into the CAD/CAM world.

CIMCO CNC-Calc is designed for ease-of-use that enables the user to draw contours fast and easily. It features common functions for drawing lines and circles in relation to the coordinate system and/or existing geometry. Functionality ranges from the plain "horizontal line" to the complex "circle tangent to three elements". It includes advanced trimming capabilities and an easy point and click approach for toolpaths layout.

CIMCO CNC-Calc imports DXF files. From DXF files it is possible to generate toolpaths for lathe and mills, such as ISO, Fanuc, and Heidenhain controllers. Other features include generation of user-defined compensation types like computer, controller, wear, and reverse wear.

Since CIMCO CNC-Calc is an integrated part of CIMCO Edit it is an easy task to view, edit, and simulate generated toolpaths. This enables the user to validate programs and thereby optimize the use of machine resources.

| 🤹 🔚 🔊 🎯 Ŧ | | | | | | | | | | | | | CIMC | D E |
|-------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|--------|------------|----------|----------------|-------------------|--------|------------|----|---------|-----|
| File Editor NC Functions | Bac | kplot | | Compa | | | mission | | NC-Cal | | | | | |
| | | <th></th><th></th><th></th><th>🐼 🗳</th><th></th><th>× 4</th><th></th><th></th><th>1 X 2 X</th><th>0</th><th>ЭS</th><th></th> | | | | 🐼 🗳 | | × 4 | | | 1 X 2 X | 0 | ЭS | |
| | Setup NC-Calc | | | ×¥ | • | . • | | | | | | | . ĭ | • |
| File | | Vi | ew | | Modify | ′ | | Snap | Dra | w Poin | ts / Line | Dr | aw Arcs | /0 |
| Constant Cut Outside in Milling.cdd | | | | | | | | | | | 1 | | | _ |
| Constant Cut Outside In | | | | | | | | | | | | | | |
| Comment | | | | | | | | | | | | | | • |
| Stock Contour | • | | | | | | | | | | | | | • |
| Area Indication | | | | | | | | | | | | | | |
| Input Contour | | | | | | | | | < . | | | • | | ~ |
| Single Step | | | | | | | | | | | | | | |
| Show Toolpath Parameters | | | | | | | | | | | | | | |
| Back New | | | | | | | | | | | | | | _ |
| Export Editor Export Clipboard | | | | | | | | | | | | | | / |
| | • | | | | | | | | | | | | | - |
| Element Info | | | | | | | | | | | | | | - |
| | | | | | | | | | | | | | | / |
| | | | | | | | | | | | | | | _ |
| | | | | | | | | | | | | | | |
| | 1 | | | | | | - | K Ì | | | | | | |
| | | | | | | | | | | | | | | 1 |
| | • | | | | | | | | | | | | | Å |
| | | | | | | | | | | | | | | _ |
| | | | | | | | | | | | | | | 4 |
| | | | | | | | | | | | | | | A |
| | • | | | | | | | | | | | | | 1 |
| | | | | | | | | | | | | | | • |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | ĺ |
| | 1 | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | ÷. | | - | | | ł | | | |
| | | achine Z | Zero X: | 0 | 0 - | | hine Zer | οY: | 0.0 | Machir | ne Zero Z | : | 0.0 | |
| | | | | U. | 0 | | | | 0.0 | | | | 0.0 | |

Select the Input Contor

CIMCO CNC-Calc performs geometric calculations and toolpath creation in seconds. Supports 2D strategies for milling and turning






Drawing with CIMCO CNC-Calc

Strategies for 2D Milling and Turning

Single Click Trimming

Trim between intersections with a single click. The element is automatically broken in two and trimmed to the two intersections closest to where you clicked.

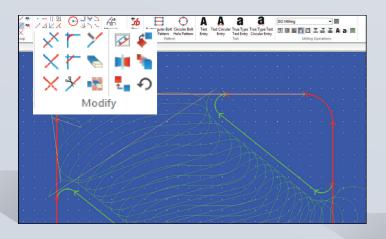


Round Corner Intersections

Create fillets on any corner intersections with any radius. Simply specify a radius for your fillet and click on the corner intersections.

Transformations

CNC-Calc includes all the transformation features expected from a modern 2D CAD system. Offset, mirror, rotate, translate, and scale part or all of the geometry.

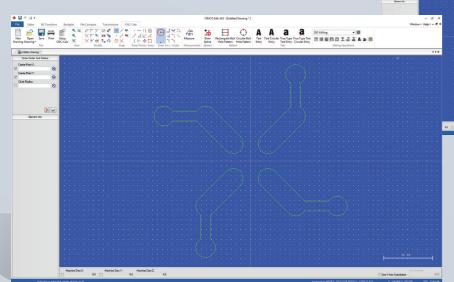


Snap to Anything

A wide variety of snap options makes it easy for you to select specific points in your drawing. Snap options such as "snap to intersections" and "snap to circles' and arcs' center points" can be activated separately, in combination, or all at once.


| 2 | 25 | =/ | * | 17 | 11 2 | § (| Э; | X | 2 | A ^s | 36 | Ξ | | 0 | | Α | A | а | | a | i0 Turni | | | • | 1 | | _ |
|---|----|----------|--------------|-----|----------|-----|------------|----|---|----------------|---------------------------|---|------------|---|-------------|---------------|-----------------|----------|-----------------|----------------------|----------|--|---|---|------|--|-------|
| 1 | Ð | 0× | Ĉ. | I F | 4 | i | | in | | feasure | Draw Spline Splines | | Bolt Com P | | loit Iem | Test Entry | Test Ca Entr | ent Entr | e True y Cec | Type Te ular Entr | N PA | | - | | P P4 | | |
| | 1 | :: | | / | 4 | ۱LL | <u>ر ا</u> | | | | | _ | | | | | | _ | | | | | | _ | _ | | _ |
| | ÷ | ** | 1 | | | × | | | | | | | | | | | | | | | | | | | | | |
| | | | | 1 | ۰, | | | | | | | | | | | | | | | | | | | | | | |
| | 11 | • | 1 | | | ~ | | | | | | | | | | | | | | | | | | | | | |
| | 1 | ~ | is. | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0 | •) | \mathbf{D} | ĸ | | | | | | | | | | | | | | | | | | | | | | | |
| | | <u> </u> | 1 | 1 | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Sr | naj | р | | | | | | | | | | | | | | | | | | | | | | |
| L | | | | | _ | | - | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Intelligent Bolt Hole Patterns

Create rectangular (rows and columns) and circular (full circle or circle segment) bolt hole patterns in seconds. This cuts down on repetitive tasks and saves you time.

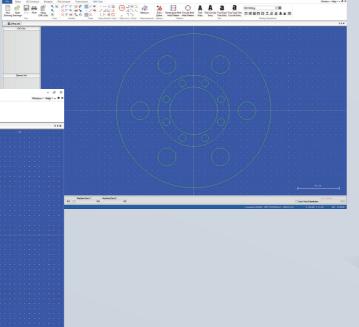

Once your 2D geometry is drawn CIMCO CNC-Calc makes it easy to lay out milling and turning toolpaths as well as drilling operations. By applying suited toolpath strategies to your model

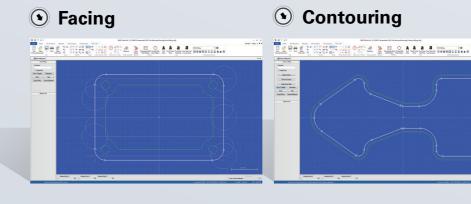


facing to prepare the raw stock for further lead-out, multiple roughing and finishing passes, The pocket toolpath can be performed using either machining, but can also be used for clearing and multiple depth cuts. Machine open and closed conventional or climb milling strategy. The entry is flat areas in general.

eliminate sharp motion with corner smoothing.

Drilling



Strategies for drilling and hole making are Thread milling makes it possible to mill internal or CIMCO CNC-Calc also supports milling of text. available in CIMCO CNC-Calc. These include external threads. It is also possible to mill several Any true-type font can be used. Simply write the drilling, counterboring, and tapping operations. holes as long as they have the same pitch, etc. For text you need to mill, and CNC-Calc can genermachines that do not support helix movements, it ate the toolpaths for the text and convert them is possible to linearize these movements.

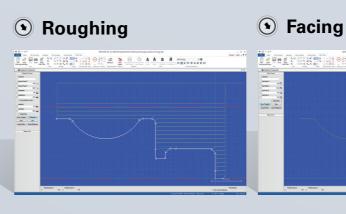


strategy enables the user to remove this material coordinates or snapping existing geometry. with the use of both roughing and finishing passes.

The Roughing operation makes it possible to The facing strategy is designed for quick part end Constant Cut is a strategy that ensures reduced remove material fast and easily. The Roughing facing. This strategy is controlled either by entering and more uniform tool wear, while at the same time significantly cutting down machining time.

CNC-Calc can generate the NC toolpaths for you. In the following, the available strategies for milling and turning operations are shown.




Pocket




The facing strategy is designed for quick part Machine 2D contours with separate lead-in and Machine closed contours with and without islands. contours without creating additional geometry and selected anywhere on the model and includes options for plunge, ramp, or helix.

Thread Milling




Letter Milling



into CNC code.


• Constant Cut

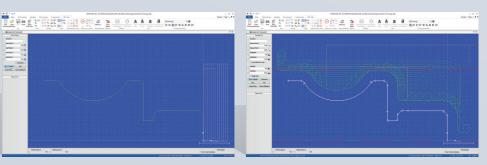

Strategies for 2D Milling and Turning


• Grooving

pecking motions.

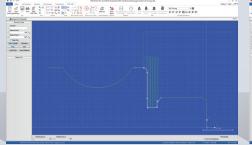

Thread (ID, OD)


Finishing

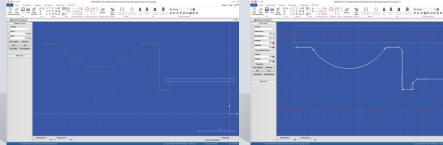

ing tools to reach those places that can not be ID (you can even choose from standard tables final finishing cut, making the part complete. reached with normal roughing and finishing tools. - metric or inch). Also, conical threads are As a possibility the entries can be performed with easily produced.

The Grooving operation enables the use of groov- It is possible to machine every thread OD and The Finish strategy is a fast way to take the


New features in CIMCO CNC-Calc

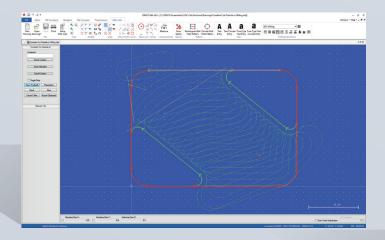

Constant Cut

Constant Cut is a roughing strategy which allows for much faster machining times than traditional roughing, and without tool breakage. The intelligent algorithm of this strategy ensures that the tool is constantly kept at the optimal tool engagement throughout the entire toolpath. Through this, a much bigger part of the cutting flute can be used, which in turn shortens the machining time enormously and assures a uniform tool wear. Ideally, you can use the entire cutting length of the tool for optimal efficiency.

Constant Cut is a highly flexible strategy which can be used for all your 2D roughing requirements. It can machine both open and closed pockets as well as cores by machining from the outside or from the inside.

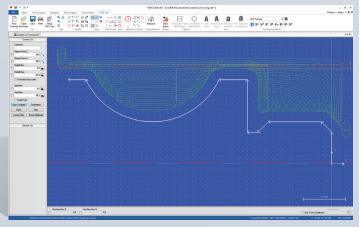

Post processor

CIMCO CNC-Calc is equipped with standard post processors for common machine controls. CIMCO CNC-Calc post processors can be freely configured to match your requirements. Additionally, post processors for any control can be built to your needs.

Europe CIMCO A/S Copenhagen Denmark Tel: +45 45 85 60 50 Fax: +45 45 85 60 53 Website www.cimco.com E-mail info@cimco.com E-mail

CIMCO Americas CIMCO Americas, LLC 651 S Sutton Road, Suite 276 Streamwood, IL 60107 Tel: +1 704 644 3587 Fax: +1 704 943 0514

